

# Прецизионная нейтронная спектроскопия на основе SESANS методики. Состояние и перспективы.

Воронин В.В.


Петербургский институт ядерной физики им. Б.П.Константинова НИЦ "Курчатовский институт"

Школа поляризованных нейтронов - 2015

# Outlook

- 1 SESANS method
- 2 Laue diffraction in perfect crystal
- 3 SESANS+Laue diffraction
- 4 Possible applications
- 5 Test experiment
- 6 Conclusion

# SESANS method

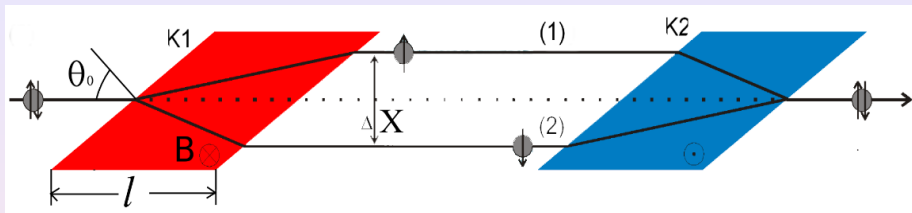


Neutron beam polarization  $\mathbf{P}$  is directed perpendicularly to guiding magnetic field  $B$ . Neutron wave function can be written in form

$$\psi_{in} = \frac{1}{\sqrt{2}} \begin{pmatrix} e^{-\frac{i\varphi_0}{2}} \\ e^{+\frac{i\varphi_0}{2}} \end{pmatrix},$$

here  $\varphi_0$  - neutron spin direction in azimuthally plane. Let's consider  $\mathbf{P}$  parallel to X-axis ( $\varphi_0 = 0$ )  $\Rightarrow$   $\mathbf{P} = (1, 0, 0)$

# SESANS method - II

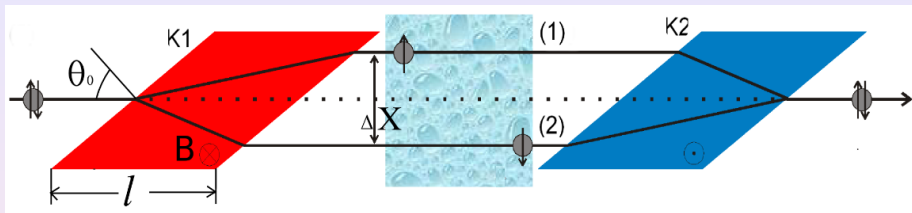


Let's apply  $V_{sr}(x)$ . The phase difference between these two eigenstates will be

$$\varphi_{sr} = (V_{sr}(x_0) - V_{sr}(x_0 + \Delta x)) / \hbar \cdot \tau,$$

The neutron wave function on the exit of coil K2 will be

$$\psi_{out} = \frac{1}{\sqrt{2}} \begin{pmatrix} e^{-\frac{i\varphi_{sr}}{2}} \\ e^{+\frac{i\varphi_{sr}}{2}} \end{pmatrix} \Rightarrow \mathbf{P} = (\cos \varphi_{sr}, \sin \varphi_{sr}, 0)$$

# Alternative SESANS layout

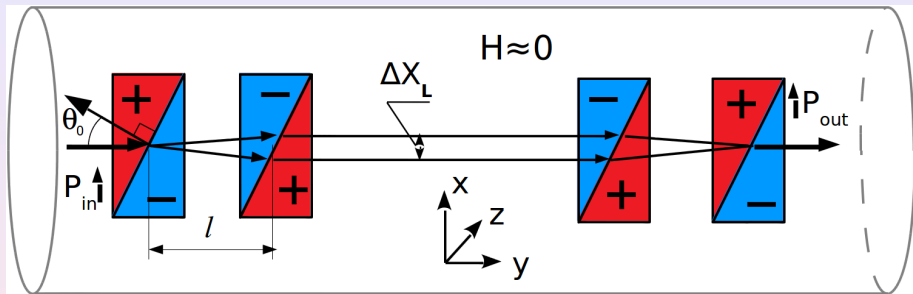


The value of spatial splitting

will be two times more than for the previous scheme

$$\Delta X_L = \frac{2\mu B}{E} \cdot l \cdot \tan \theta_0$$

# Classical SESANS interpretation

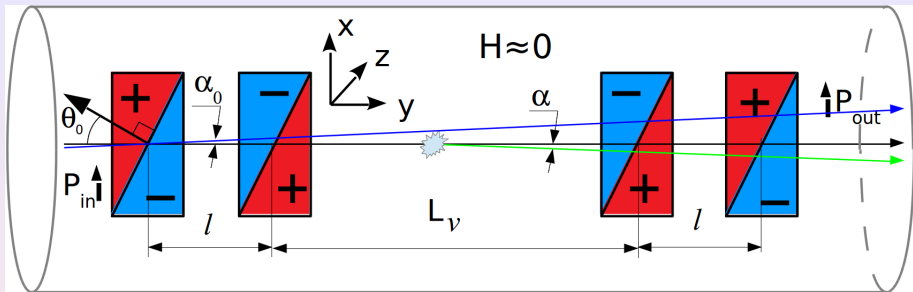


Single coil make a spin modulation in X direction  $\phi(x) = 2B\gamma_n \tan(\theta_0) \frac{x}{v}$   
 Angle of neutron spin rotation will be

$$\phi = \frac{2B\gamma_n \tan(\theta_0)}{v} (0 - l\alpha_0 - (L_v + l)\alpha_0 + (L_v + 2l)\alpha_0) \equiv 0$$

After the scattering on  $\alpha$  angle  $\phi(\alpha) = \frac{2B\gamma_n \tan(\theta_0)}{v} \cdot l\alpha$

# Laue diffraction. Two wave approximation

For the case of neutron diffraction on single crystallographic plane, **wave function is a superposition of direct and reflected wave**

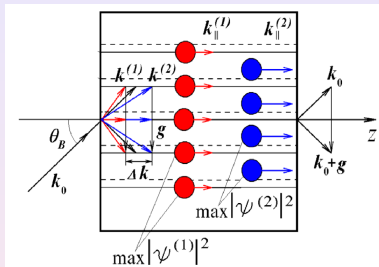



$$\psi^{(1)} = \frac{1}{\sqrt{2}} [e^{i\mathbf{k}^{(1)}\mathbf{r}} + e^{i(\mathbf{k}^{(1)} + \mathbf{g})\mathbf{r}}] = \sqrt{2} \cos(\mathbf{g}\mathbf{r}/2) \exp[i(\mathbf{k}^{(1)} + \mathbf{g}/2)\mathbf{r}]$$

$$\psi^{(2)} = \frac{1}{\sqrt{2}} [e^{i\mathbf{k}^{(2)}\mathbf{r}} - e^{i(\mathbf{k}^{(2)} + \mathbf{g})\mathbf{r}}] = i\sqrt{2} \sin(\mathbf{g}\mathbf{r}/2) \exp[i(\mathbf{k}^{(2)} + \mathbf{g}/2)\mathbf{r}]$$

# Dispersion surface


Direction of neutron current is normal to dispersion surface

$$\mathbf{j} = \frac{\hbar}{m} (|a_g|^2 \mathbf{k}_g + |a_0|^2 \mathbf{k})$$

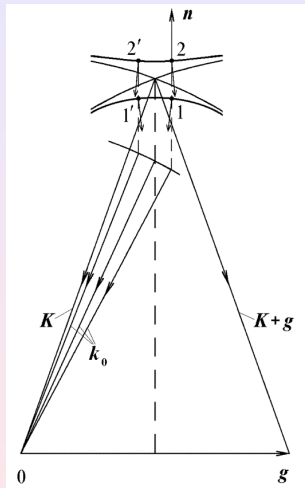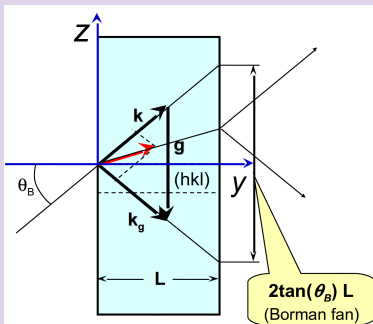



# Neutron trajectories in crystal



Symmetrical Laue diffraction.

$\mathbf{j}_{(1)}$  and  $\mathbf{j}_{(2)}$  are the neutron fluxes for two direction of incident beam.

## Effect of diffraction enhancement



The neutron in the crystal changes the momentum direction by the angle of  $\Omega$  (by **several tens degrees**) while the incident neutron beam deflects by the Bragg width (**within a few arc seconds**)

$$\Omega = \Delta\theta \cdot \frac{E}{2v_g} \Rightarrow \Delta\theta \cdot 10^5$$


The same phenomenon occurs then not direction but neutron energy is changed according to the

$$\Delta\theta = \frac{\Delta E}{2E} \tan \theta_B$$

# Measurement the neutron prism refraction<sup>1</sup>

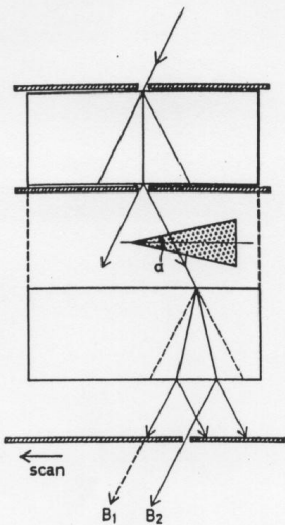



⇐ no refracting prism



⇐ 0.032 arc sec =  
=  $1.5 \cdot 10^{-7}$  rad  
refracting prism

<sup>1</sup>S.Kikuta et al., J. Phys. Soc. Japan, **39** (1975) 471

# Change neutron length wave in magnetic field<sup>2</sup>

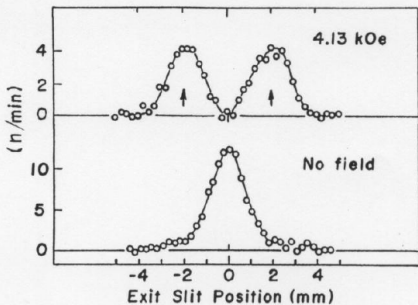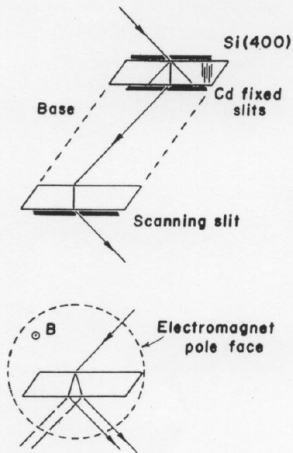


⇐ 4.13 kOe  
magnetic field  
 $\Delta E = 50$  neV

⇐ no magnetic  
field

<sup>2</sup>A.Zeilinger, C.G.Shull, Phys.Rev.B **19** (1979) 3957

# SESANS + Laue diffraction

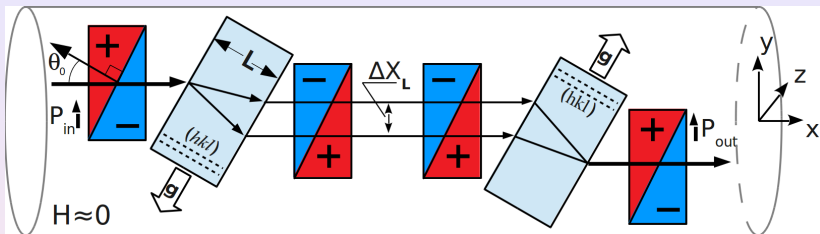

The values of neutron splitting

Laue diffr.+SESANS


Standard SESANS

$$\Delta X_L = \frac{2\mu B}{v_g} L \sin \theta_B \cdot \tan \theta_0 \iff \Delta X = \frac{2\mu B}{E} \cdot l \cdot \tan \theta_0$$

**About**  $K_g = \frac{E}{v_g} \Rightarrow 10^5$  **times more.**


$\Delta X_L$  for silicon (220) and (100) quartz planes,  $L = 10$  cm,  $\tan \theta_0 = 1$  and  $\theta_B = 65^\circ$  can be  $\sim 40\mu\text{m}$  and  $\sim 120\mu\text{m}$  for the  $B = 1$  G.

# Two crystal focusing<sup>3</sup>




Spatial resolution

$$x_w = \frac{\Lambda \tan(\theta_B)}{2\pi} \sim (10 - 50) \mu\text{m}$$

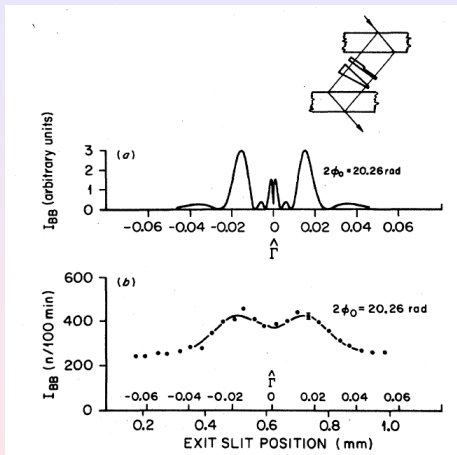

<sup>3</sup> x-rays - Инденбом ВЛ., Слободецкий И.Ш., Труни К.Г. ЖЭТФ (1974) 66 1110  
 neutron - J. Arthur, C. G. Shull, A. Zeilinger, Phys. Rev. B, 32 5753 (1985)

# New layout of SESANS + Laue diffraction

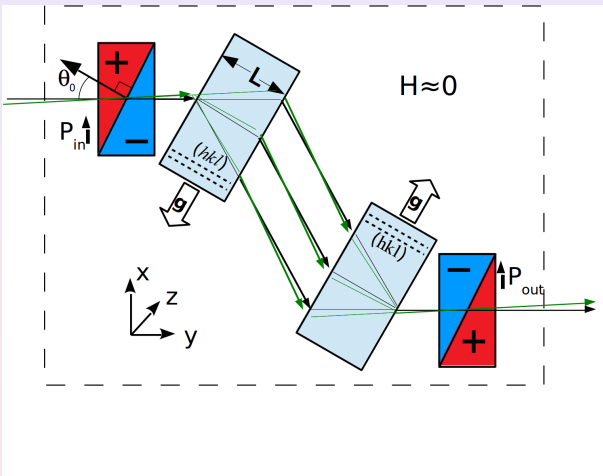

## Advantages -

- More luminosity
- Only two coils
- More space in working area.

## Disadvantage -

- Nobody saw the two crystal diffraction focusing effect in separated crystals

# Sensitivity of SESANS + Laue

## Angle of spin rotation

$$\varphi_v = \frac{dV}{dx} \Delta X_L \cdot \frac{L_v}{\hbar v_n} \simeq 5 \cdot 10^{12} \cdot \frac{dV}{dx} [eV/cm]$$

For the (100) quartz plane ( $d=4.255\text{\AA}$ ,  $v_g = 1.8 \cdot 10^{-8}\text{eV}$ ),  
 $\theta_B = 65^\circ, L = 10\text{cm}, \tan \theta_0 = 3, B = 100\text{G}, L_v = 100\text{cm}$

Spatial period  $\Rightarrow 0.25\text{ mm}$

## Statistical sensitivity

Accuracy of spin rotation measurement can be about  $10^{-4}\text{ rad}$ , so

$$\sigma \left( \frac{dV}{dx} \right) \simeq 2 \cdot 10^{-17} [eV/cm] \simeq 2 \cdot 10^{-8} m_{ng}$$

$$\sigma(\alpha) \simeq 10^{-12} \text{rad}$$

# Motivations

- Test of a neutron electro-neutrality  $\frac{dV}{dx} = E_e q_n$ .

$$\sigma(\varphi) = 10^{-4} \implies \underline{\sigma(q_n) \simeq 2 \cdot 10^{-22} e}$$

about one orders better present accuracy\*.

\* J. Baumann, R. Gähler, J. Kalus, W. Mampe, PR D37, 3107 (1988)

- Study the neutron gravity in the Earth with the sensitivity

$$\underline{\sigma(m_n g) \sim 10^{-8} m_n g}$$


- Search for the new fundamental interaction of a neutron with the matter (5-th force) at the range distance about 0.01 – 1 cm
- Measurement of a matter refracting index  $\implies$  amplitude of neutron scattering with stat. accuracy

$$\underline{\sigma(a_n) \sim (10^{-5} - 10^{-6})} \text{ for condensed matter}$$

$$\underline{\sigma(a_n) \sim (10^{-3} - 10^{-4})} \text{ for gas}$$



# Two crystal focus test for plane (220) silicon




Crystal -  
 $110 \times 110 \times 100 \text{ mm}^3$   
 Displacement vs angle

$$x_\alpha = 2 \cdot 10^7 \alpha \text{ [mm]}.$$

Spatial resolution 3 mm  
 corresponds to the angular


Scan by the exit slit at  $\theta_B = 68^\circ$

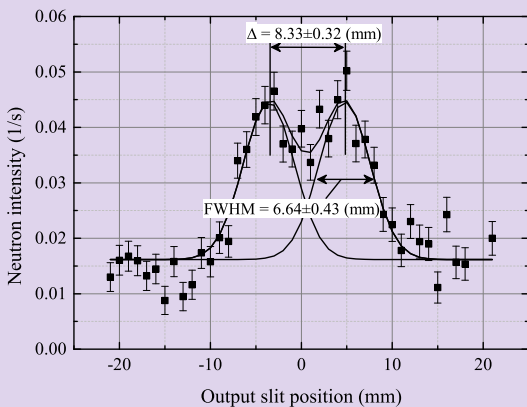


$$\alpha_W < 1.5 \cdot 10^{-7} = 0.03''$$

# Two crystal setup construction


## Quartz crystal and coils



## Photo of the setup

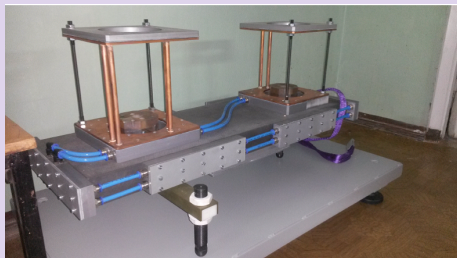

## Coils test



# Summary

New approach for precise neutron spectrometry is proposed.

It is based on two principle

- spin interferometer technique **SESANS**
- effects in perfect crystal **Laue diffraction**

A method sensitivity can reach

$$\sigma \left( \frac{dV}{dx} \right) \simeq 10^{-16} [eV/cm] \Rightarrow \underline{\sigma(E_n) \sim 10^{-14} eV}$$

This approach can be applied for

- Test of a neutron electro-neutrality with the best accuracy
- Study the neutron gravity in the Earth with the sensitivity
- Search for the new fundamental interaction
- Precise measurement of an amplitude of neutron scattering